Important: For the first 36 hours after the initial installation, make sure to periodically inspect for leaks while the system is running and while it is turned off. If a leak occurs, shut off the water supply, open up the filter faucet to release pressure from the system & contact Aquasana Technical Support (866)662-6885.

Aquasana, Inc. | www.aquasana.com
6310 Midway Road | Haltom City, Texas 76117
USA 866.662.6885 | Canada 877.332.7873

AQ-RO3-RM_replace_20140915

aquasana
Live Healthy

Model AQ-RO3-RM

Remineralizer Replacement

for use with AQ-RO-3

1. Remove the remineralizer from the packaging
2. Important: Make sure the system is not under pressure, the RO tank is completely drained and the water supply line is shut off. You can drain the tank and release the pressure by shutting off the supply line & opening up the filter faucet until there is no longer any water coming out of the faucet.
3. Once the tank is completely drained and the RO system is no longer under pressure, remove the 3/8 hose from the inlet and outlet of the remineralizer by pushing and holding down the white collar while pulling the hose out.

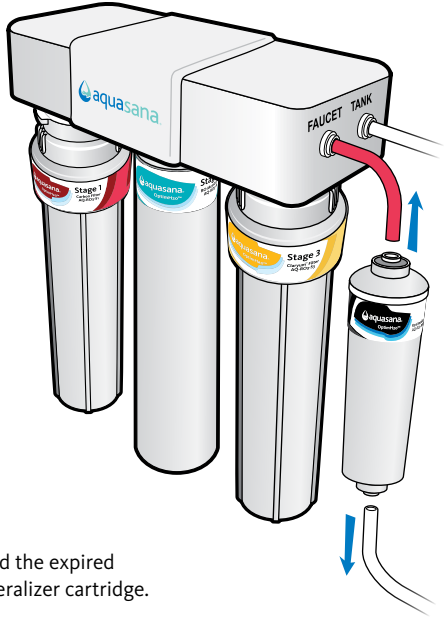

4. Discard the expired remineralizer cartridge.
5. Insert the white 3/8 hose that is attached to the faucet into the outlet connection of the new remineralizer by pressing the hose in until it completely stops
6. Connect the remaining hose end (which has the opposite end connected to the RO manifold outlet labeled “Faucet”) to the inlet portion of the Remineralizer by pressing the hose in until it completely stops.

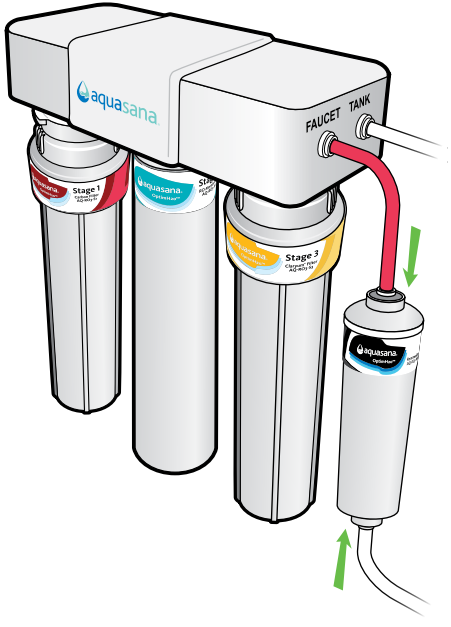

7. Shut off the filter faucet, turn on the water supply and allow the RO tank to fill up completely (this may take around 2 hours).
8. Once the tank has completely filled, inspect for leaks.
9. If there are no leaks, flush the filter cartridges by opening up the RO faucet and allowing the water to run through the filters until there is no longer any pressure coming out of the RO faucet.
10. Close the RO faucet, allow 2 hours for the pressure to build back up in the system and your RO system is ready to use.